



**SOLO** *SERIES*  
USER MANUAL v2.0


# What's Included



1 x Solo LockBox



1 x HELLO Card



3 x Screw Cap




3 x Mounting Screws



3 x Screws Anchors



1 x Reset Tool



Screw Driver x 1


## What are the differences

- >1. OTA upgrade: Support remote software upgrade
- >2. App: Simplified user interface / features


# Specification

<b>Model</b>	Solo
<b>Material</b>	Body Zinc Alloy, SUS304
<b>Battery</b>	4 x AAA Alkaline Battery
<b>Unlock Mechanism</b>	Bluetooth, PIN Code, App
<b>Jump Start</b>	USB-C


**Front**

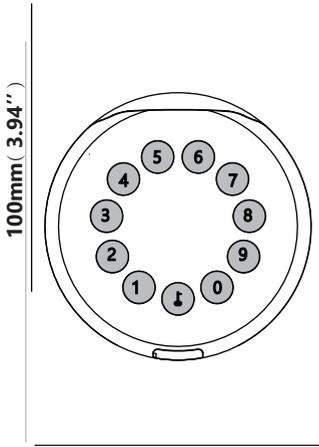

**Inside**

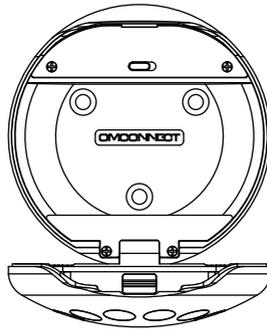

**Back**

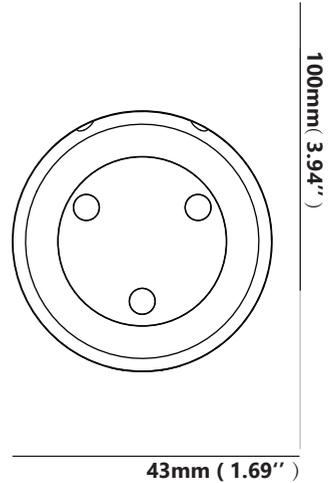

100mm (3.94")

# Features

## Lock&Unlock



### Administrator Unlock

Set a Master Administrator PIN for Unlocking, settings, operations etc. and only the administrator could change the administrator PIN code.



### Anti-peeping

Add up to 10 digits before and after PIN code to intensify your PINs.



### User Unlock

This LockBox allows to add up to 100 user PIN codes for your family, friends and visitors.



### Auto Locking

If there are no opening motions in 10 seconds the box will be automatically locked.

## Mobile Control



### Bluetooth one-touch unlock

With your Mobile you could unlock the LockBox by tapping the "🔒" on the App.



### Offline Unlock

You could generate offline code through mobile App, for scheduled access, parcel delivery, housekeeping, etc.



### Mobile Administrator

Set Administrator PIN Codes from your Mobile to unlock, add users, delete users, etc.



### OTA Upgrade

Upgrade online, Fix bugs, Update functions and optimize user experience.

## Battery



### Battery Life

4 AAA batteries, the life cycle will be more than 12 months, please use good batteries.



### Low Battery

When the battery runs out of power, system will remind you to replace the batteries.



### Low Consumption

BLE broadcasting turns to sleep mode if no operations.

## Emergency



### Jump Start

When the power is down and use USB-C to jump start the lock and get it unlocked




### System Lockdown

The lock will be lockdown for 5 minutes if continuously enter wrong PINs for 5 times.


## Quick Start

### Step 1 > Install Battery

>1. Remove the battery cover

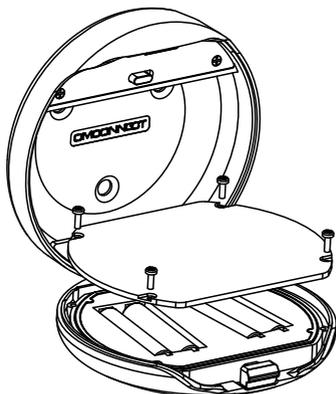


>2. Put 4 AAA batteries into the battery dock.

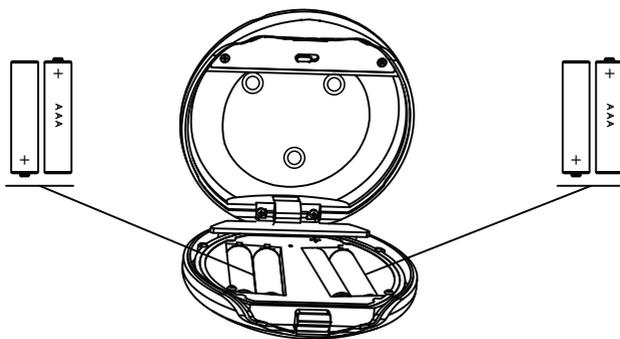


## Step 2>Change Admin Password-Initial Admin Password:123456

>1. Press  and hold for 3 beeps

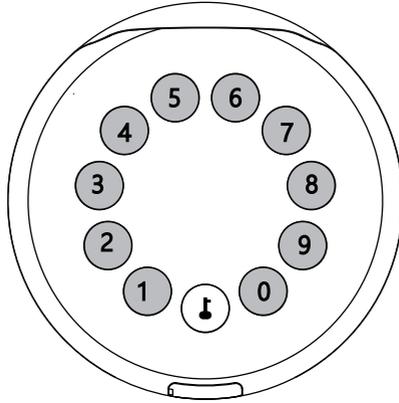

>2. Right after the 3 beeps please key in:

Initial Admin code 123456 +  +new admin code+  +new admin code again + , when you hear a long beep with green light, the new admin password has been set.

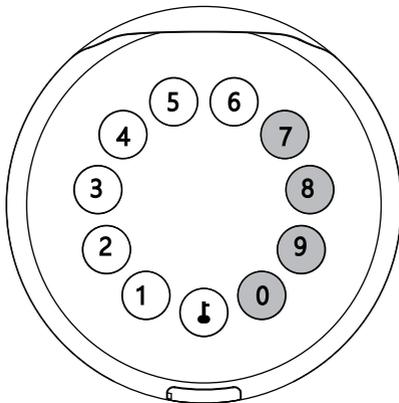


## Step 3 > Download Mobile App

>1. Scan QR Code below and download the App and turn on your mobile Bluetooth




## Step 4 > Add Device

>1. Go to App Home page, click Add Device or click "+" on the upper right.

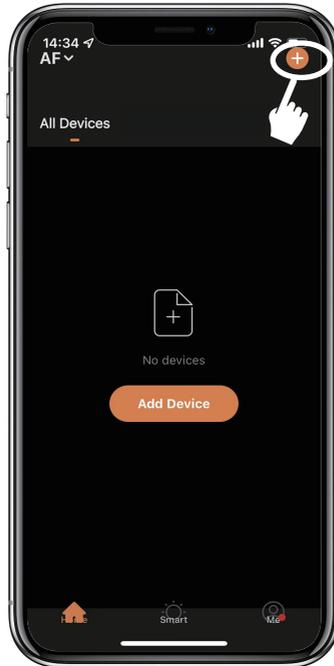


Activate Bluetooth to enter pairing mode

- > **2.** Press **⏻** + **9** + **⏻** and enter Admin password + **⏻** , when the light slowly blinks in blue the KeyBox is ready to pair.

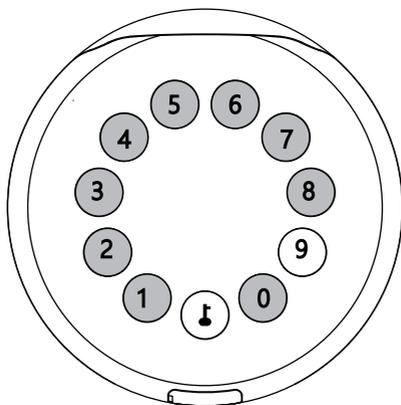

>3. You will see the detected device and click "Go to add".

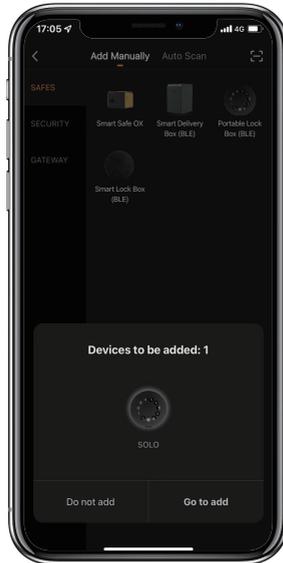

>4. Connecting, you need to wait for few seconds to let it finish.



>5. Device added



# Mechanical Instructions

## Password & Factory Mode:

### 1. Password Length

☒ Password must be 6 digits (no more no less)

### 2. Add User Password

☒ Tap **⏏** + 0 + **⏏** until the blue light blinks

>. Enter admin password + **⏏**

>. Enter new user password + **⏏**

>. Enter new user password again and press **⏏**

>. When the **⏏**(Enter button) blinks in green, user password has been set.

### 3. Delete User Password

☒ Tap **⏏** + 2 + **⏏** until the blue light blinks

>. Enter admin password and press **⏏**

>. Enter the user password you wish to delete and press **⏏**

>. Enter the user password again and press **⏏**

>. When the **⏏** (Enter button) blinks in green the password has been deleted.

### 4. Delete All User Password

☒ Tap **⏏** + 00000 + **⏏** until the blue light blinks

>. Enter admin password and press **⏏**

>. When the **⏏** (Enter button) blinks in green, all user passwords have been deleted.

### 5. Virtual digits-Anti Peeping

☒ Add any digits before and after the correct password the LockBox unlock as always

### 6. System Lockdown

☒ LockBox will Lockdown for 5 minutes if entering wrong password continuously 5 times.

### 7. Reset Factory Mode

☒ Use the reset tool press and hold the reset button for 5 seconds until a long beep.

## Bluetooth broadcasting & re-connecting:

☒ Bluetooth will turn to sleep mode and lights out if no operations within 1 minute.

☒ Touch any key to activate the Bluetooth, LockBox will get reconnected again with App.


# App Instructions

## How to unlock:

- You will see all devices on the home page.
- Tap the Smart Lock Box to start operating.




- Swipe the  to the right to unlock.

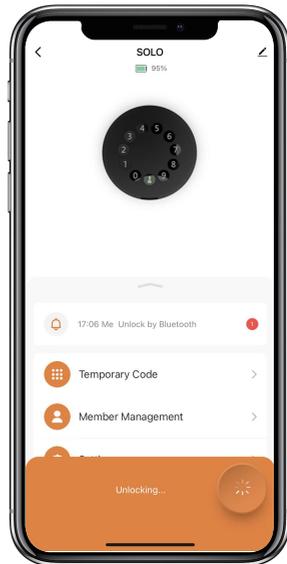


# How to get Temporary code:

☒ Tap "Temporary Code"

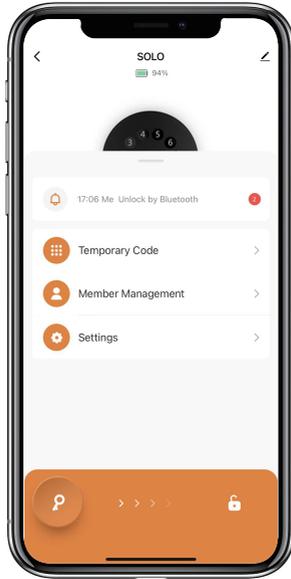



☒ Tap "Obtain Password" to get Dynamic code which is valid for 5 minutes.

☒ Tap "OK" to confirm and also can Tap "Share" to share this code with family or friend.

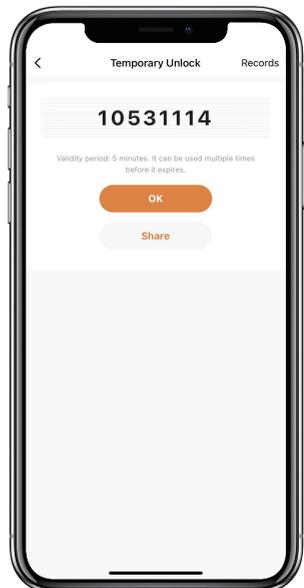



## How to add Members:

☒ Tap “Member Management” to add family member or others.

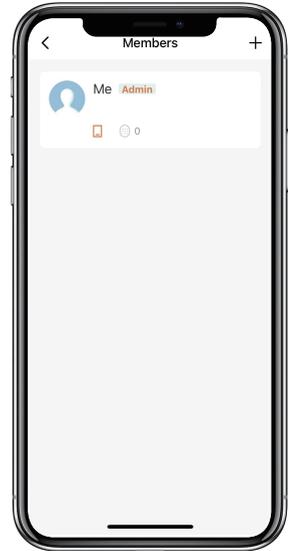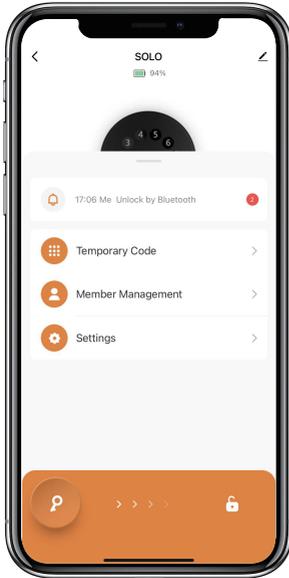

☒ Tap “+” to add member and edit member’s information and save.



☒ Member will receive an invitation on the App, after he/she accept it, Admin can find the member in the list.

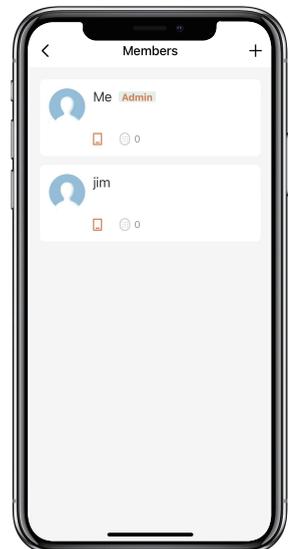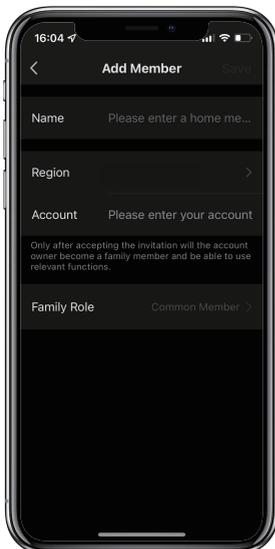


## How to add Permanent code:

☑ Tap the Admin “Me” to add Permanent code.

☑ Tap “Add” to enter the Permanent code you want to set or get Random Permanent code and save.

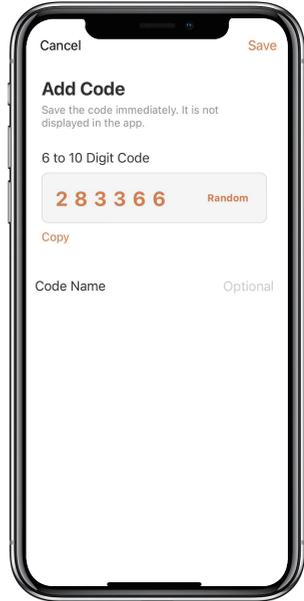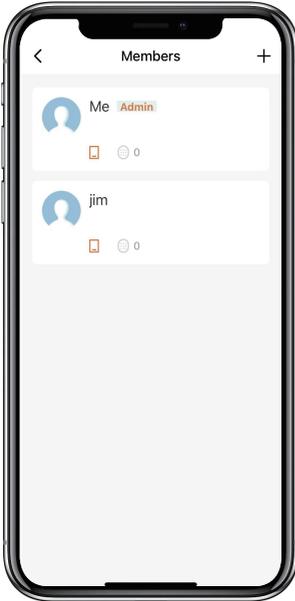



☑ You are able to use the Permanent code to unlock the device.

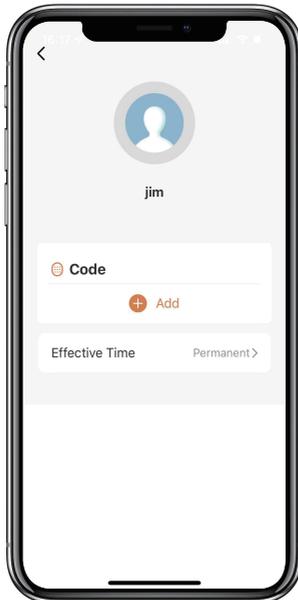

## How to manage Members:

☒ Tap the Member you want to manage.



☒ Tap "Add" to set the Permanent code for the Member and save.

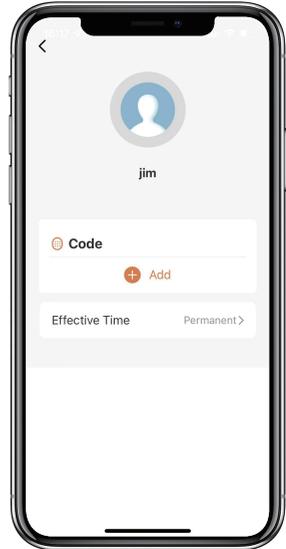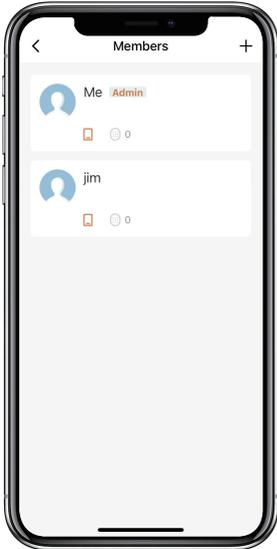

☒ Tap "Effective Time" to set this Member is Permanent or Custom and save.


☒ Set the validity period of Custom Member(Year/Month/Day/Hour/Minute).

☒ Members have no permission to access admin.

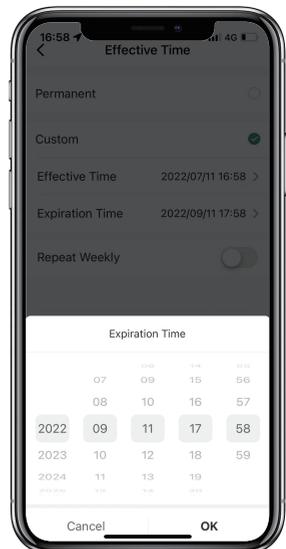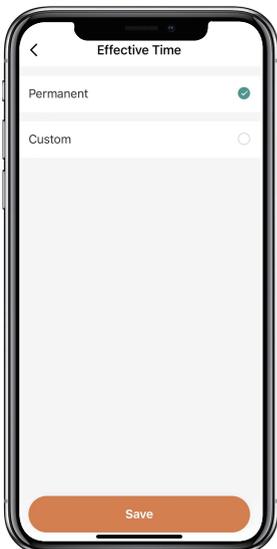

# How to check Opening Log:

☒ Tap  to check the Log.

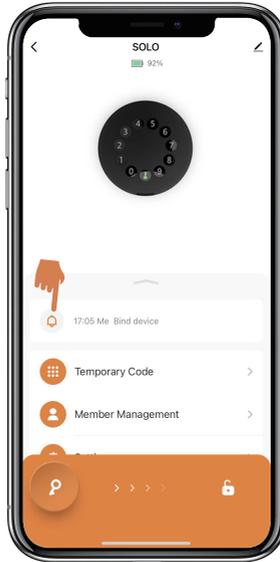

☒ You will find out when and whom opened the Keybox.



# OMUARK

[WWW.OMCONNECT.COM](http://WWW.OMCONNECT.COM) / [WWW.OMUARK.COM](http://WWW.OMUARK.COM)