

User Manual

Smart Delivery Box Uark & Uark Mini



UARK




UARK MINI

OMFOCUS TECH is committed to the design, production and marketing of smart safety products. The new brand **OMUARK** symbolizes **yoUr Ark**, which will escort your smart and safe life. All our smart box products will be under this brand.

Thanks for Choosing our products.
For more information, please visit our official website
www.omuark.com www.omconnect.com

What's Included

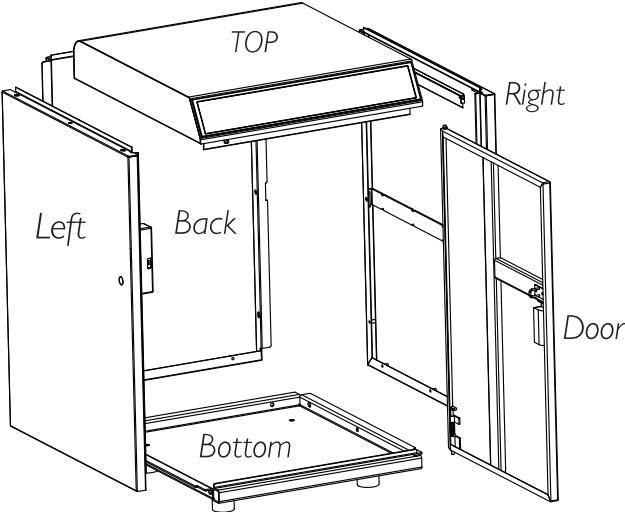


TOP Case X 1
Right Plate X 1
Bottom Plate X 1

Left Plate X 1
Back Plate X 1
Door Plate X 1




Screwdriver x 1



Ground-Mount Screw x 4



Foot x 4



Hexagon Screwdriver x 1




Positioning Tool x 1



Lock Body x1



Assembling Screw x 22



Wall-Mount Screw x 4
(Uark Mini Only)




Foot Locking Screw x4



Mechanical Key x 2



Reset Tool x 1




Hello Card x1


Specification

Model	Uark & Uark Mini
Material	Galvanized Steel
Battery	4 × 18650 Lithium Rechargeable Battery
Unlock Mechanism	Bluetooth, PIN Code, App, Mechanical Key


UARK

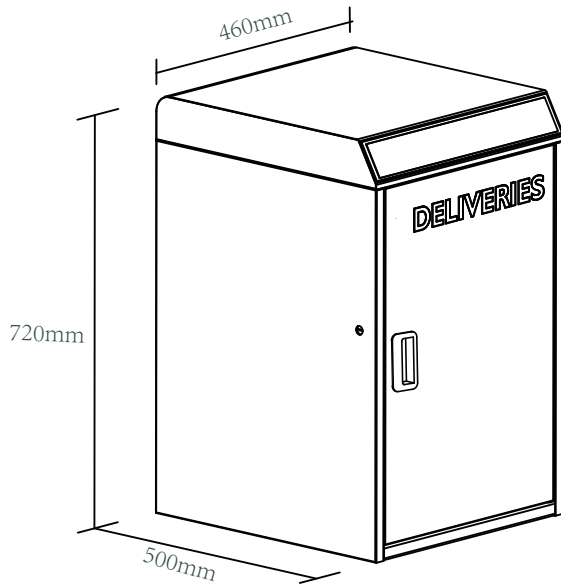


UARK MINI

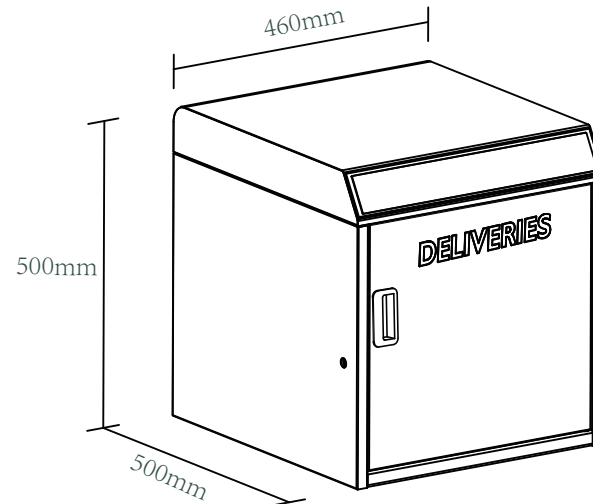


Assembly

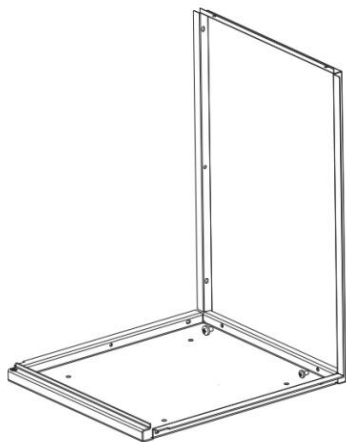


Step 1: Screws * 2

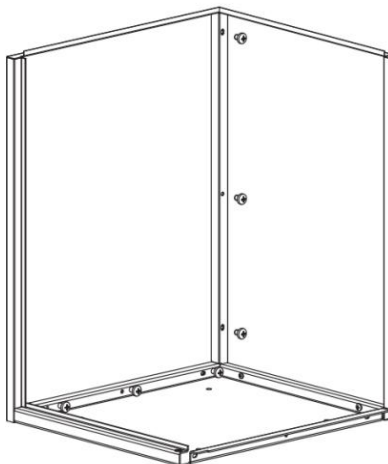


Step 2: Screws * 6

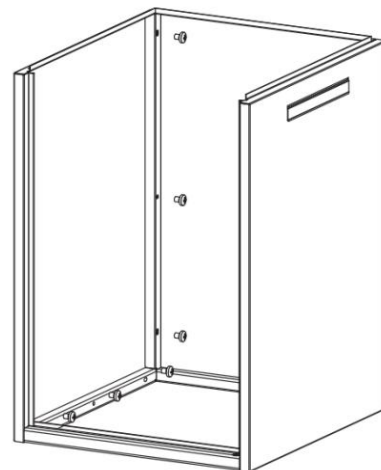


Step 3: Screws * 6

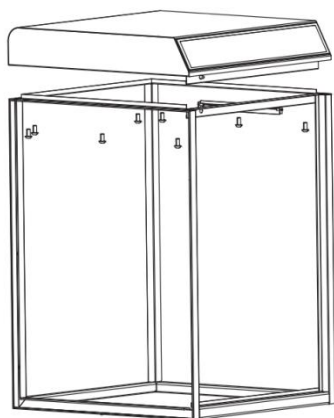

Step 4: Screws * 8

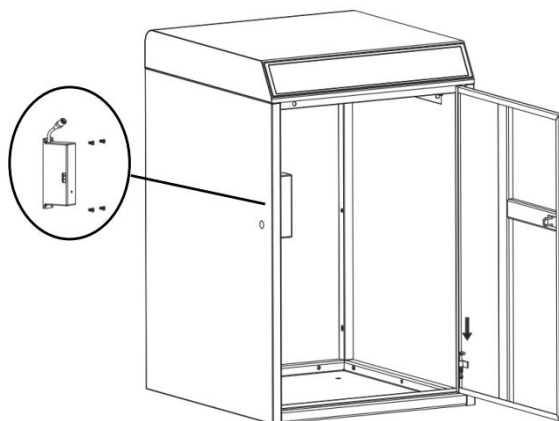

**Step 5: Door Pin * 1
Screws to install the lock Body * 4**

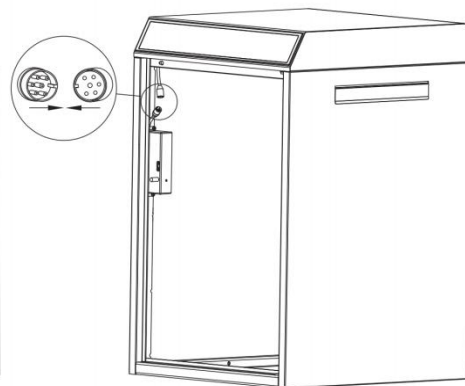

Step 6: Cable Connection

Features

Lock&Unlock



Administrator Unlock

Set a Master Administrator PIN for Unlocking, settings, operations etc. and only the administrator could change the administrator PIN code.




One Touch to Unlock

When there is no package in the Uark, the courier can directly One Touch to unlock the Uark and complete the delivery without a code.

Mobile Control



Bluetooth Unlock

With your Mobile app you could unlock the Safe by swiping the  to the right.



Mobile Administrator

Set Administrator PIN Codes from your Mobile to unlock, add members, delete members, etc.



User Unlock

This Delivery Box allows to add up to 90 Pickup Passwords for your family, friends and tenants.



Remote Sharing

You could generate offline code through mobile App and let your friends and family retrieve the packages from Delivery Box easily.



OTA Upgrade

Upgrade online, Fix bugs, Update functions and optimize user experience.

Battery



Battery Life

The battery lifetime will be 12 months for operating. The battery with a capacity of more than 3000mAh is better.



Low Consumption

BLE broadcasting turns to sleep mode if no operation.



Low Battery

When the battery runs out of power, system will remind you to replace the batteries.



Letter Delivery

Easy mail and letter delivery with standard mail slot on the right.

UVC Sterilization (If have)



15 minutes UVC Sterilization only after the Delivery Box unlock by Delivery Code. Independent power supply by one set of 2 × 18650 Lithium Rechargeable Battery. You can turn on or turn off the UVC Sterilization by **"UVC Switch"** on Top case.

Emergency



Emergency Unlocked

When the power is down, we can use Mechanical Key to open the Delivery Box.





System Lockdown

The lock will be lockdown for 5 minutes if continuously enter wrong PINs for 5 times.

Installation


- > 1. Delivery Box U ARK/ U ARK Mini can be mounted on the ground with 4 ground-mount screws.
- > 2. Delivery Box U ARK Mini can be mounted on the wall with 4 wall-mount screws.

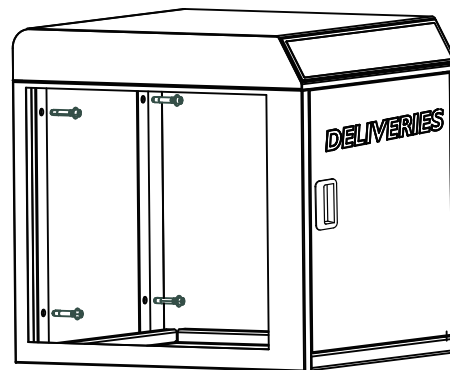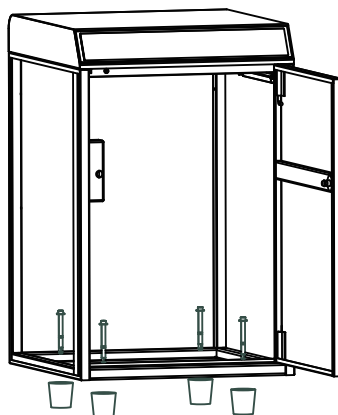

Quick Start

Step 1 > Install Battery

- > 1. Put 4 ×18650 Lithium Rechargeable Battery into the battery dock on the Top case.
One set for Keypad operation, another set for UVC light.

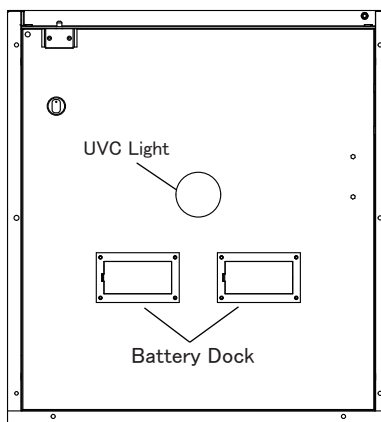


Under the Top Case

Step 2>Change Admin Password-Initial Admin Password:123456

Administrator is required to reset the admin code before adding other user codes.

>1. Tap * + 0 + * and wait for 2 quick beeps


1	2	3	*
4	5	6	0
7	8	9	#



>2. Right after the 2 beeps please key in:

Initial Admin code 123456 + # +new admin code+ # +new admin code again +#, when you hear a long beep with green light, the new admin password has been set.
Admin code can be used to pick up the packages.

1	2	3	*
4	5	6	0
7	8	9	#



Step 3>Download Mobile App


> 1. Scan QR Code below and download the App and turn on your mobile Bluetooth. You can also choose to download other App supported by Tuya.



Step 4>Add Device

Activate Bluetooth to enter pairing mode

> 1. Tap * + 9 + * + admin code + #, when you see the light slowly blinks in blue then the Delivery Box is ready to pair.

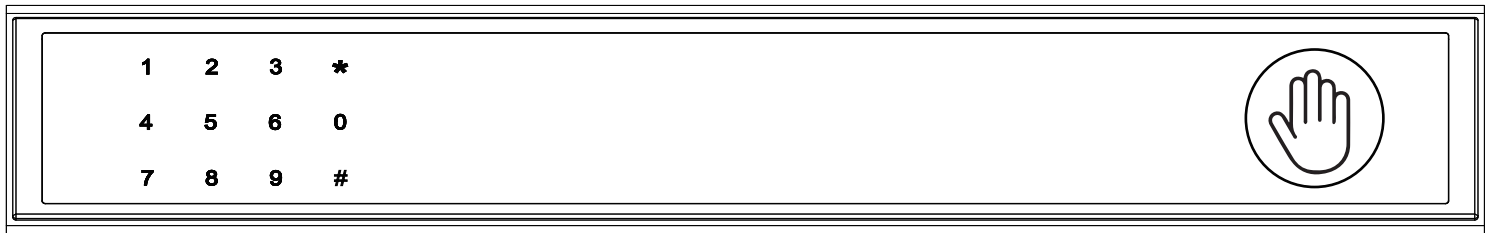


Bluetooth broadcasting & re-connecting:


☒ Bluetooth will turn to sleep mode and lights out if no operation within 1 minute.

☒ Tap any key to activate the Bluetooth, App&Device will get reconnected each other.

> 2. Go to App Home page, click "Add Device" or click "+" on the upper right.

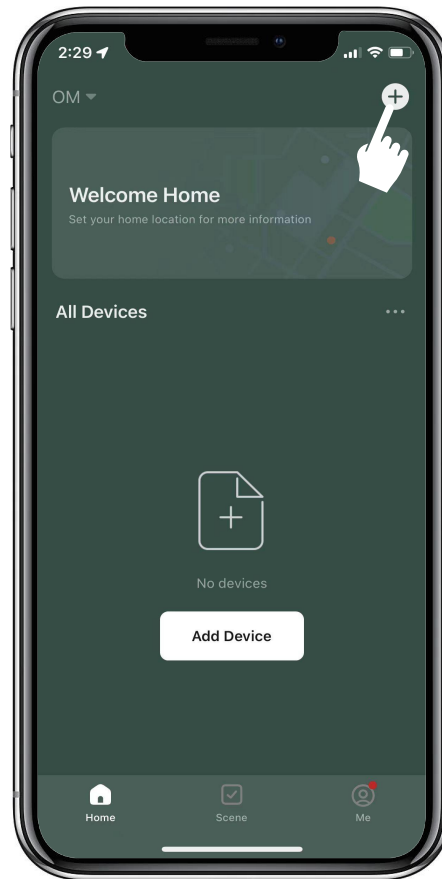


>3. You will see the detected device and click "Go to add".

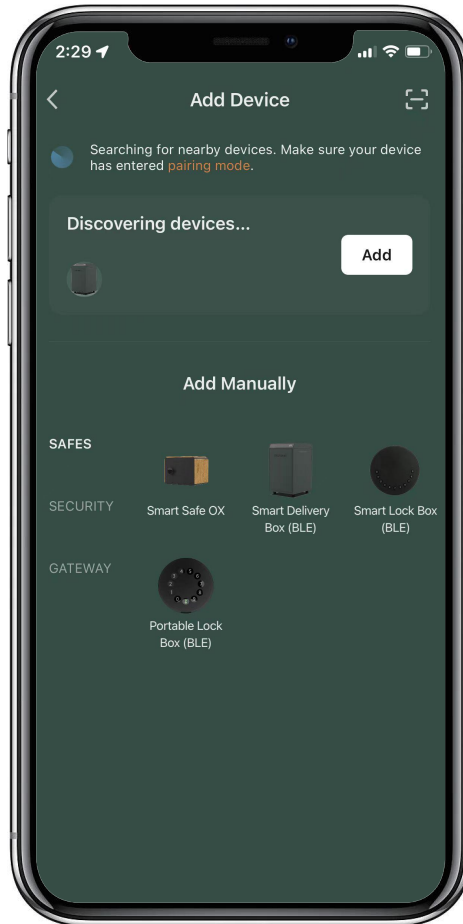

>4. Connecting, you need to wait for a few seconds to let it finish



>5. Device added

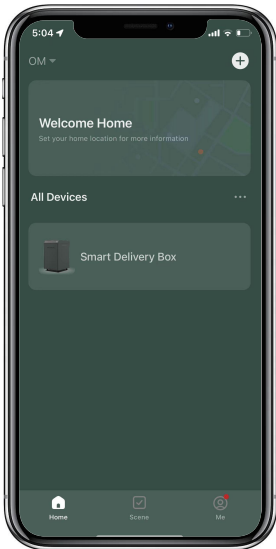

How to receive and pick up the packages?

- ☒ Share Delivery Code with couriers to receive the package in the Uark and use Pick Up Code or App Unlock to pick up the packages.
Please follow the instructions below to learn more about Delivery Code and Pick Up Code.

Mechanical Instructions

Password & Factory Mode:

1. Password Length

- ☒ Password must be 6 digits (no more or less)

2. Add Delivery Code

User can add the last 6 digits of phone number or 6 digits PIN Code as Delivery Password.
Please share Delivery Code with couriers by noting it in the package delivery information.

- ☒ Tap *+1+* until the blue light blinks
 - >. Enter admin password + #
 - >. Enter new delivery password + #
 - >. Enter new delivery password again and tap #
 - >. When the button blinks in green, delivery password has been set.

3. Delete Delivery Password

- ☒ Tap * + 2 + * until the blue light blinks
 - >. Enter admin password + #
 - >. Enter the delivery password you want to delete and tap #
 - >. Enter the delivery password you want to delete again and tap #
 - >. When the button blinks in green the password has been deleted.

4. Delete All Delivery Passwords


- ☒ Tap * + 00000 + * until the blue light blinks
 - >. Enter admin password and tap #
 - >. When the button blinks in green all passwords have been deleted.




5. System Lockdown

- ☒ Delivery box will Lockdown for 5 minutes if entering wrong passwords continuously 5 times.

App Instructions





How to unlock by App:

- ☑ Find all devices on the home page.
- ☑ Tap the Smart Delivery Box to start operating.
- ☑ Swipe the  to the right to unlock.

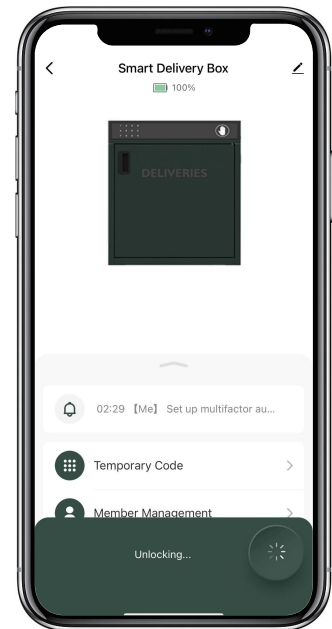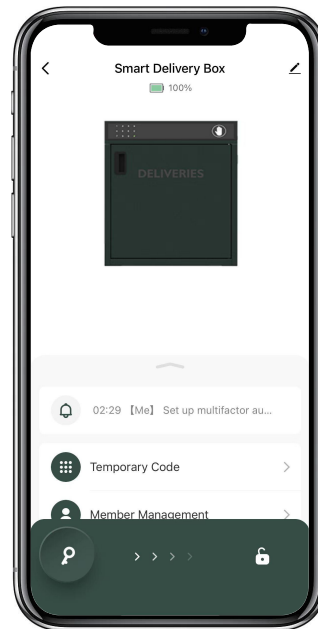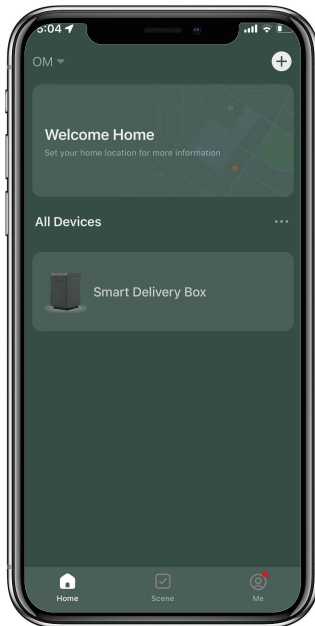




How to add Temporary Pick Up Code:

- ☑ Tap “Temporary Code”, there are 3 kinds of Temporary Pick Up Code
- ☑ Time-Limited Code which is valid for a set time. Single-use code which is valid for one time only. Dynamic code which is valid for 5 minutes.
- ☑ Time-Limited, single-use and Dynamic Codes belong to the Pick Up Codes

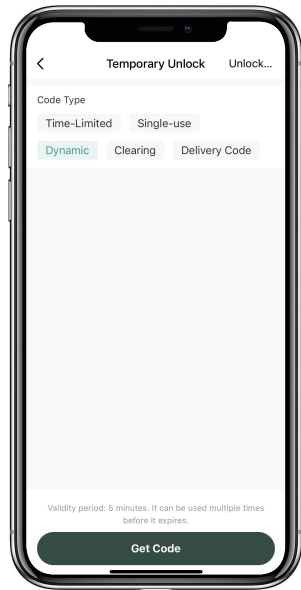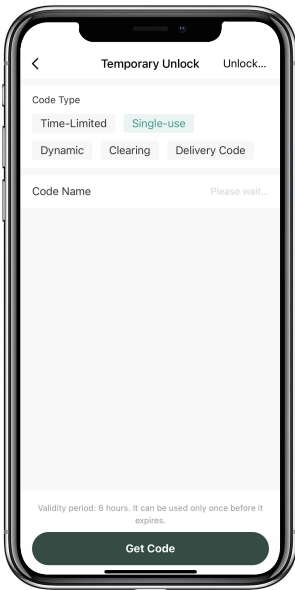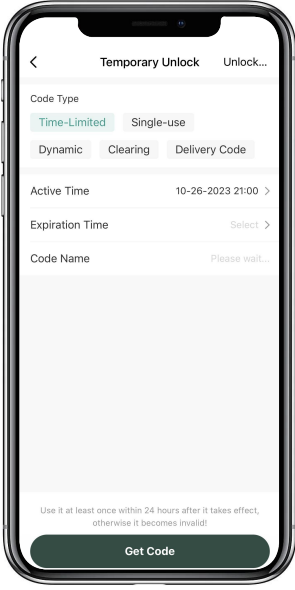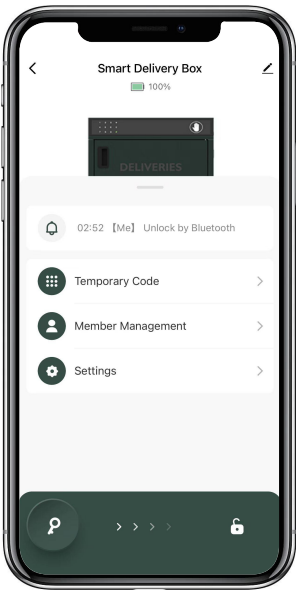





How to add Temporary Delivery Code:

☑ Tap the “Delivery Code” to add temporary code. It is valid for a set time and can be customized.

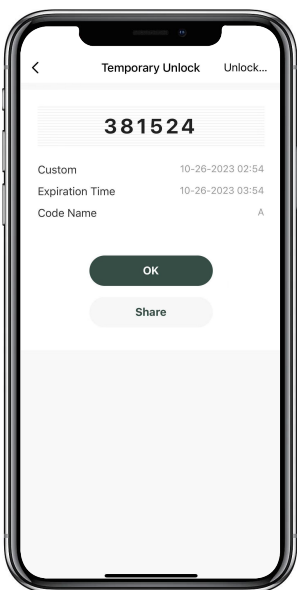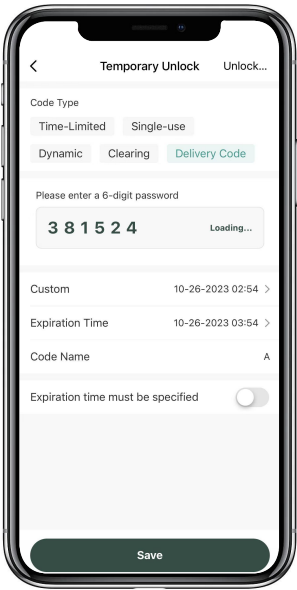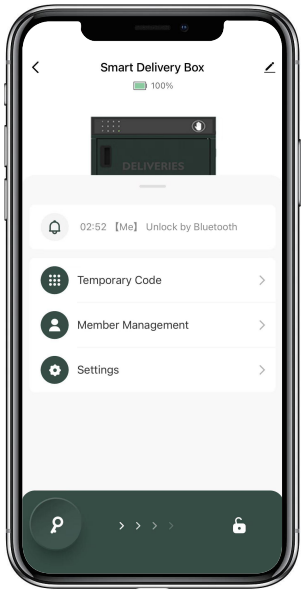





How to add Members:

- ☑ Member should download the App and register an account by phone number or email.
- ☑ Tap “Member Management” to add family member or others.
- ☑ Tap “+” to add member and edit member’s information and save.

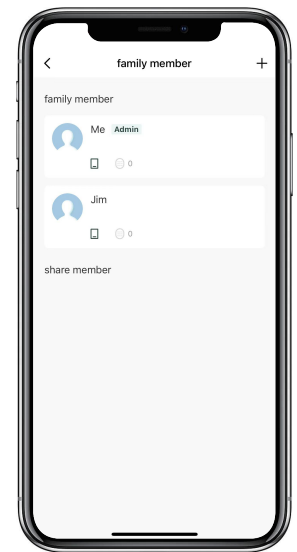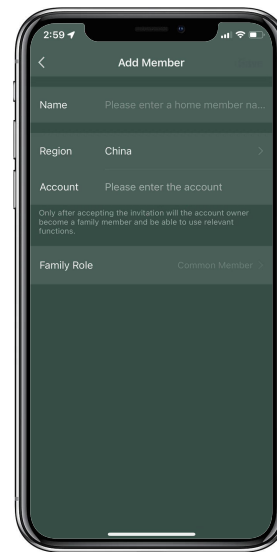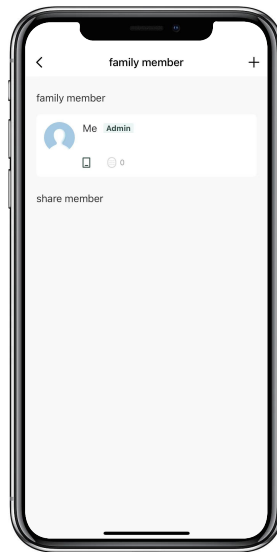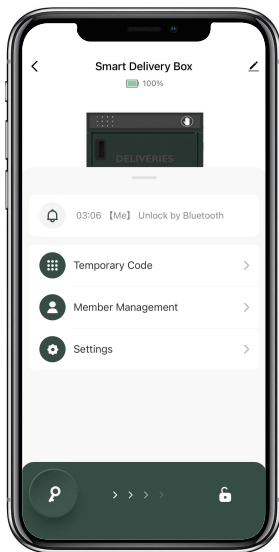

How to add Delivery Code for Member:



- ☑ Tap "Member Management" to find the Member.
- ☑ Tap "Add" to enter the Delivery Code you want or get Random Delivery code and save.
- ☑ Tap "Effective Time" to set this Member is Permanent or Custom and save.
- ☑ Set the validity period of Temporary Member(Year/Month/Day/Hour/Minute).

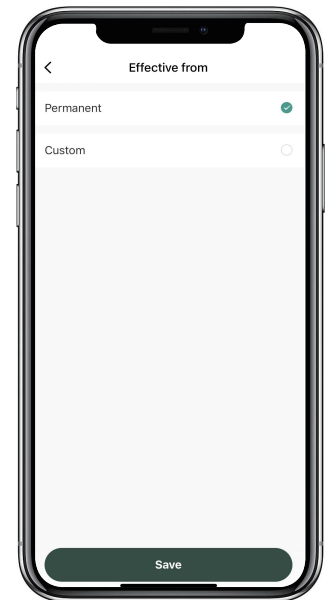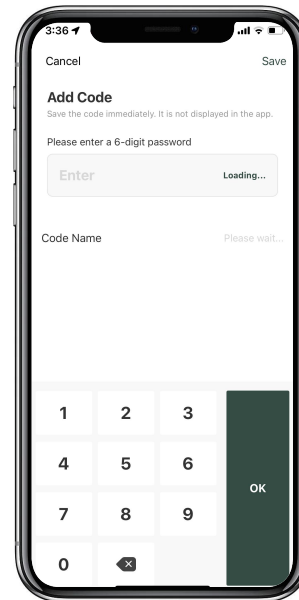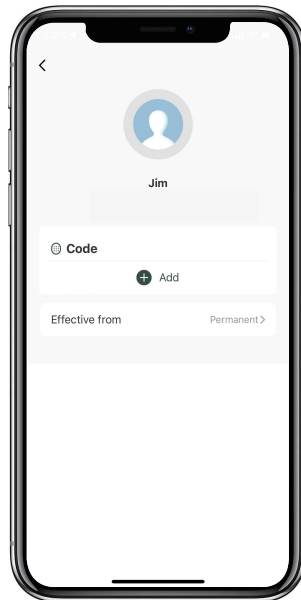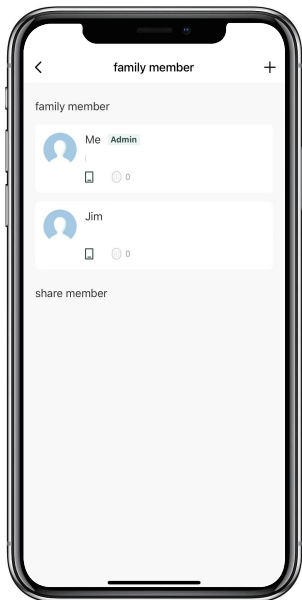

How to check Opening Log:

☑ Tap  to check the Log.




☑ You will find out when and whom opened the delivery box.

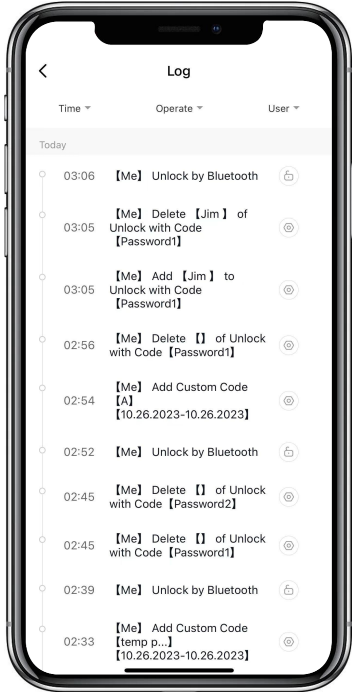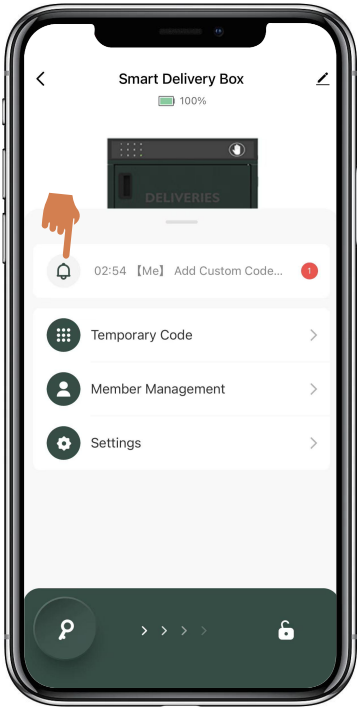

How to Switch the Language of Voice Prompt:




☑ Tap "Settings" and go to "Language".

☑ Select the language you want and confirm.

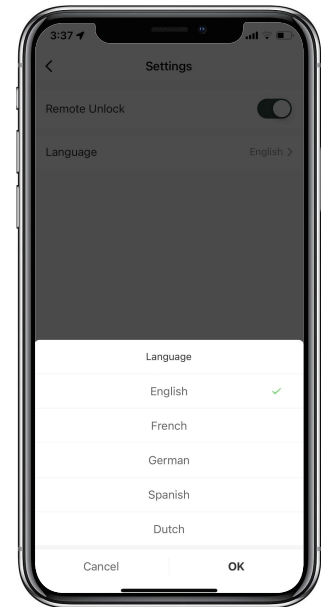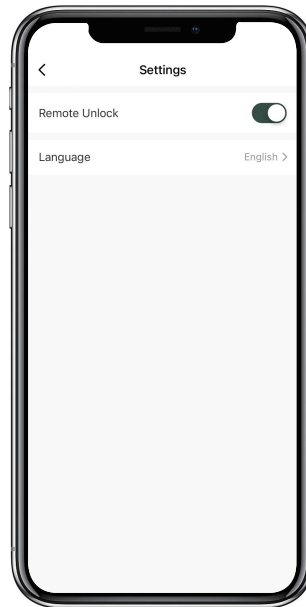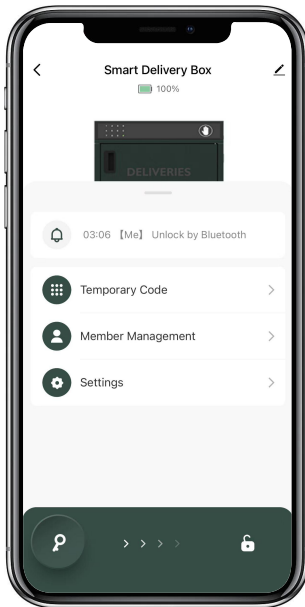


How to Reset the Delivery box with App:

- ☑ Tap the upper right to check the Device Information
- ☑ Tap "Remove Device" and confirm to "Disconnect and wipe data".
- ☑ After a long beep, the delivery box has been initialized. Admin code is back to 123456.
- ☑ It is necessary to change the Admin code before adding other user codes.

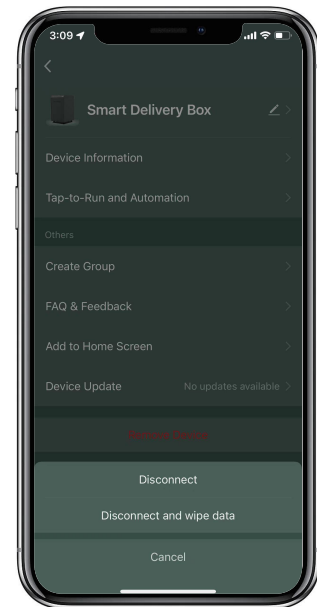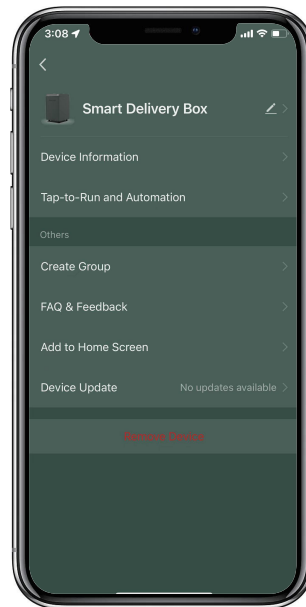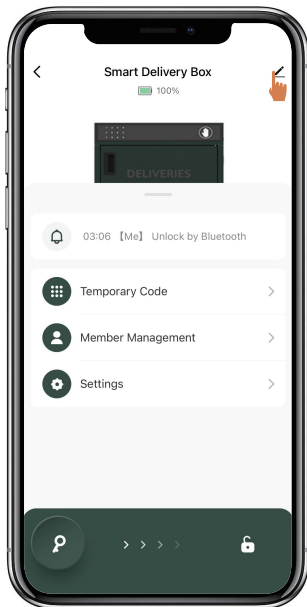

How to Reset the Delivery box without App:

- >1. If you forget the Admin code, you are still able to reset the box by Reset button.
- >2. The Reset button is on the back of the lock body.
- >3. Please use Reset Tool press and hold the Reset button for 5 seconds until a long beep.
- >4. After a long beep, the delivery box has been initialized. Admin code is back to 123456 #.
- >5. It is necessary to change the Admin code before adding other user codes.

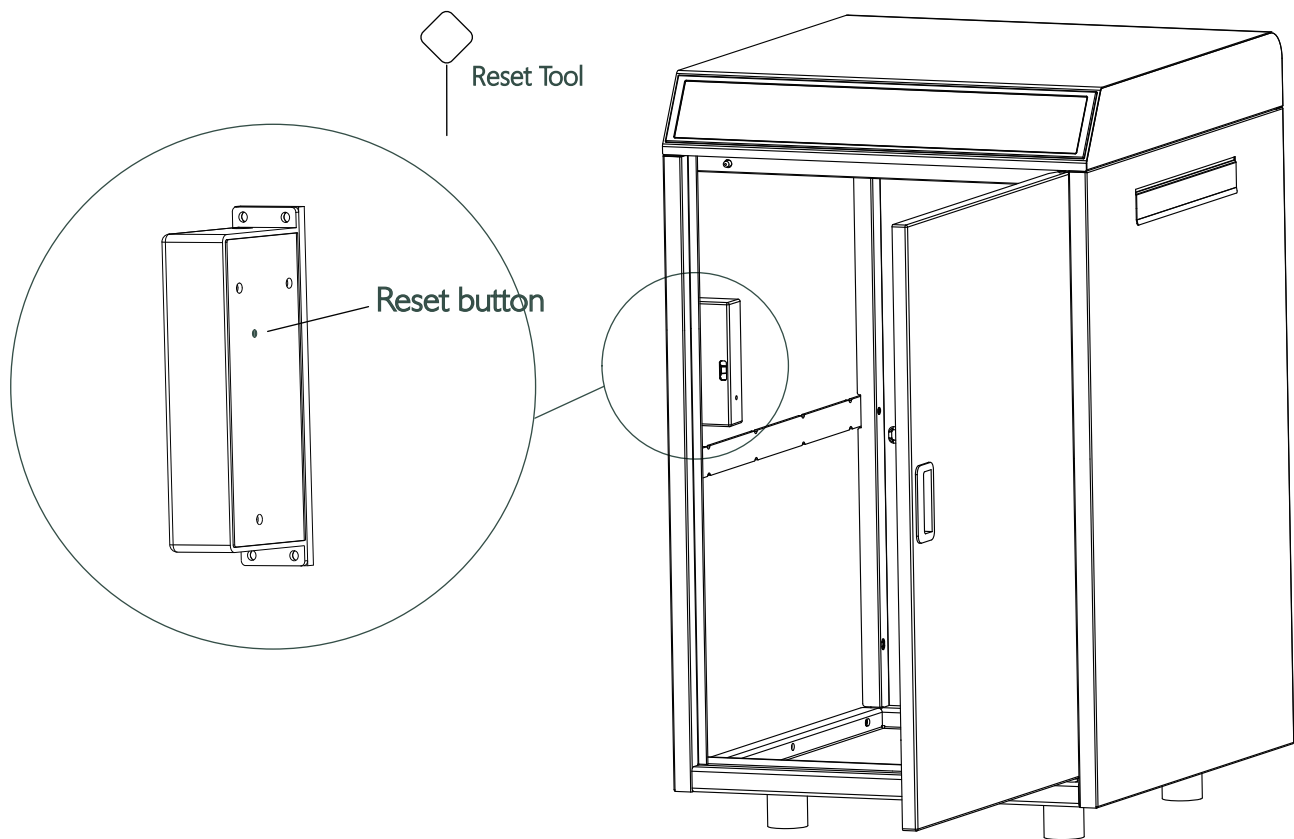

OMUARK

WWW.OMCONNECT.COM / WWW.OMUARK.COM